






TECHNICAL INFORMATION

| | |
|-----------------------|------------------|
| HRFC Series | |
| Pitch Available (mm) | 10.16 |
| Poles Available | 2 - 12 |
| Solid Wire (AWG) | 6 - 20 |
| Stranded Wire (AWG) | 6 - 20 |
| Wire Strip Length | 13~14mm |
| Voltage Rating | 300V |
| Current Rating | 55A |
| Withstanding voltage | 1.6KV |
| Operating Temperature | -40°C to +115 °C |






| Poles | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Dim L | 20.16 | 30.32 | 40.48 | 50.64 | 60.80 | 70.96 | 81.12 | 91.28 | 101.44 | 111.60 | 121.76 |
| Dim B | 10.16 | 20.32 | 30.48 | 40.64 | 50.80 | 60.96 | 71.12 | 81.28 | 91.44 | 101.60 | 111.76 |
| TOL | ±0.25 | | | | | ±0.35 | | | | | |

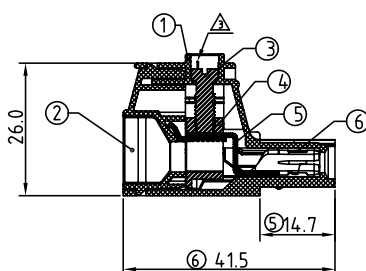
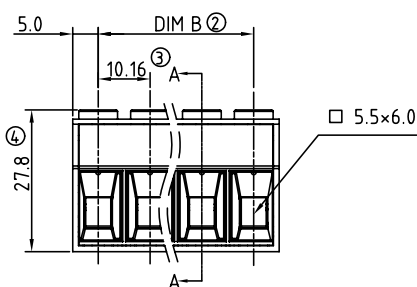


SECTION A-A

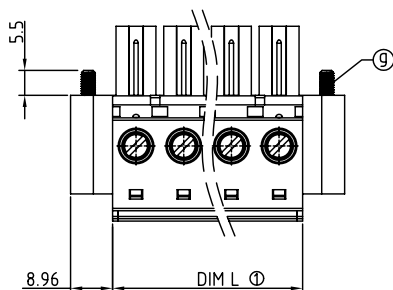


With Screw Flange

| Poles | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Dim L | 20.16 | 30.32 | 40.48 | 50.64 | 60.80 | 70.96 | 81.12 | 91.28 | 101.44 | 111.60 | 121.76 |
| Dim B | 10.16 | 20.32 | 30.48 | 40.64 | 50.80 | 60.96 | 71.12 | 81.28 | 91.44 | 101.60 | 111.76 |
| TOL | ±0.25 | | | | | ±0.35 | | | | | |

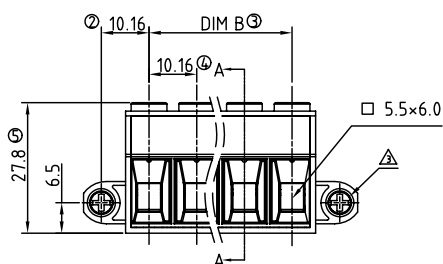

SECTION A-A



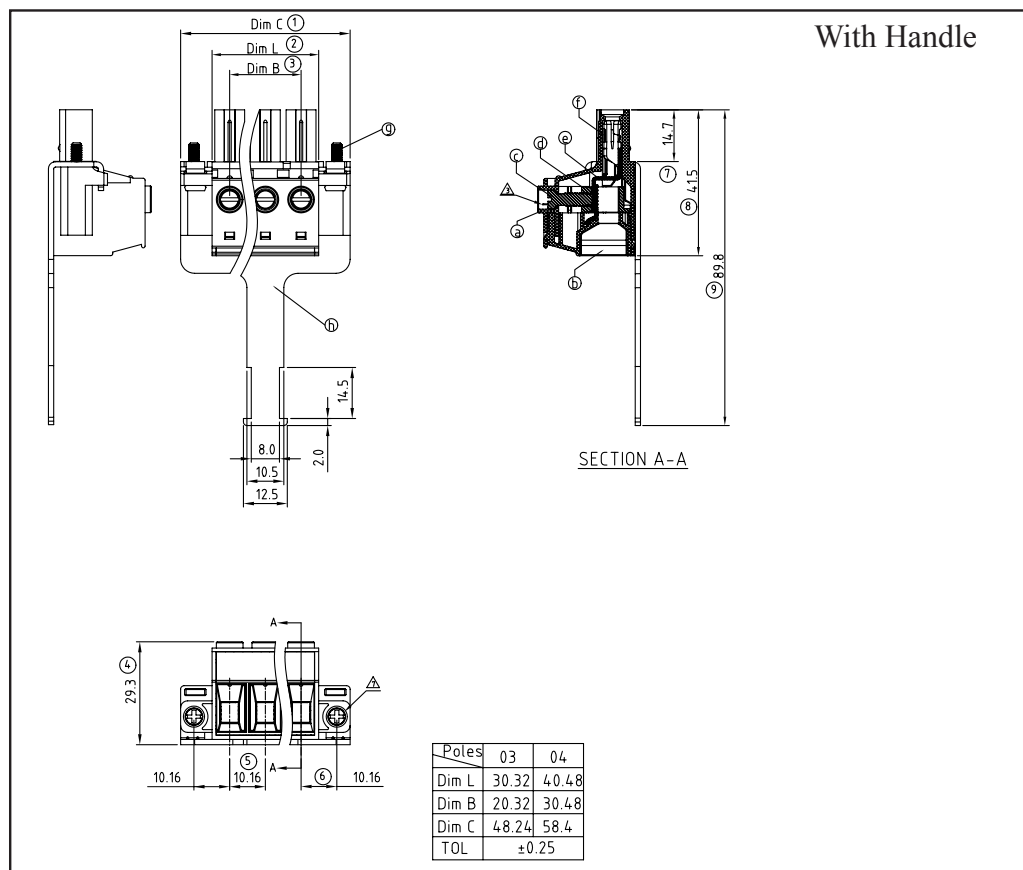

ORDERING CODES

