

# PCB MOUNTED TERMINAL BLOCKS

## HRTB Series




[www.hitaltech.com](http://www.hitaltech.com)

### TECHNICAL DATA

|                       |                         |
|-----------------------|-------------------------|
| Pitch Available (mm)  | 19.00                   |
| Poles Available       | 1 pole                  |
| Voltage Rating        | 600V                    |
| Current Rating        | 101A                    |
| Solid Wire (AWG)      | 3 - 18                  |
| Stranded Wire (AWG)   | 3 - 18                  |
| Wire Strip Length     | 10~11mm                 |
| Withstanding voltage  | 1.6KV                   |
| Operating temperature | -30°C + 105 °C          |
| Soldering Temperature | 250°C ± 10°C/ 5 Sec     |
| Housing               | Thermoplastic (UL94V-0) |

### DRAWINGS

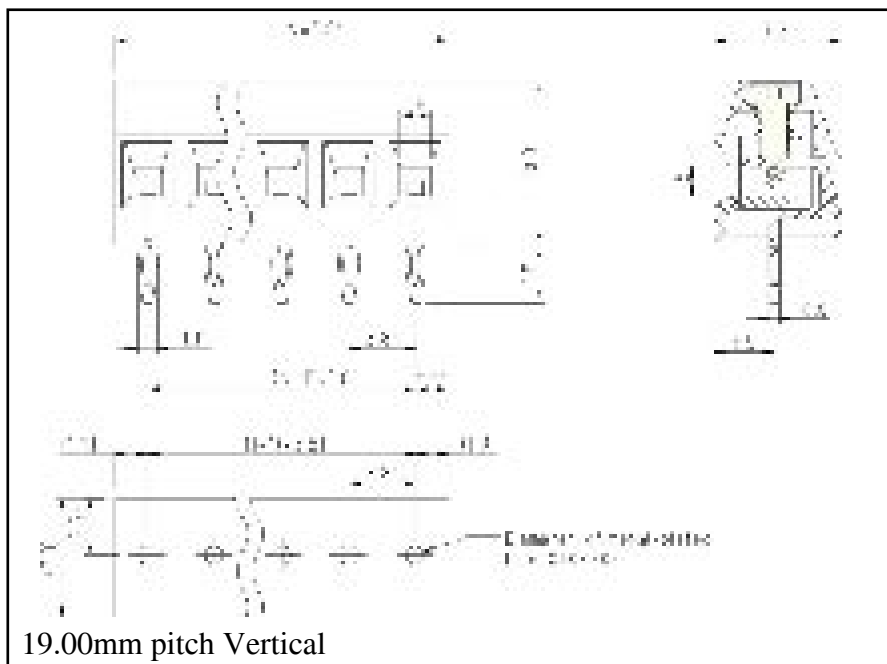

### ORDERING CODES

|             |  |  |          |                    |  |
|-------------|--|--|----------|--------------------|--|
| <b>HRTB</b> | <b>XX</b><br>Poles   | <b>X</b><br>Pitch (mm)                               | <b>X</b> | <b>X</b><br>Colour | <b>X</b>   |
| 1 Pole      | 0<br>Pin Type<br>Middle Contact<br>(single) + Side<br>Contact (single) | 0<br>Screw & Clamp<br>Slot Screw<br>W/Steel Stamping | 6        | 10.16mm            | N Black<br>V Green (RAL6018/7)<br>B Blue<br>G Grey |