



MALE SOCKET HMSD Series (Vertical/Horizontal)







TECHNICAL DATA



| HMSD Series | |
|---------------------------|-----------------|
| Pitch Available (mm) | 3.5 |
| Poles Available | 2*2 - 2-24 |
| Voltage Rating | 160v |
| Current Rating | 6A |
| Withstanding Voltage (KV) | 1.32KV |
| Operating Temperature | -30°C to +105°C |

Available with locking screw flange

DRAWINGS

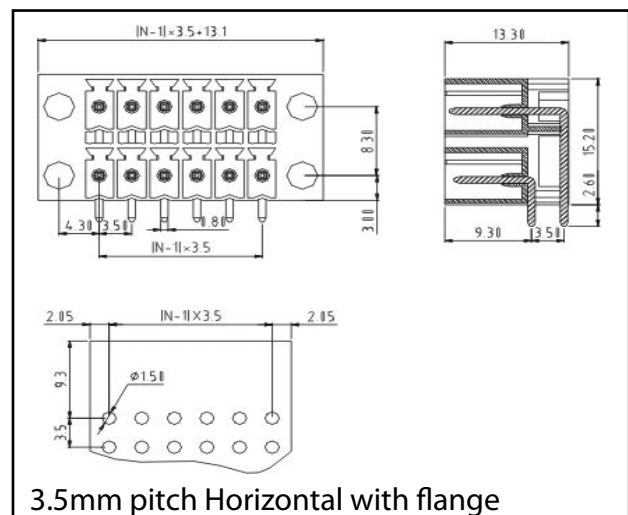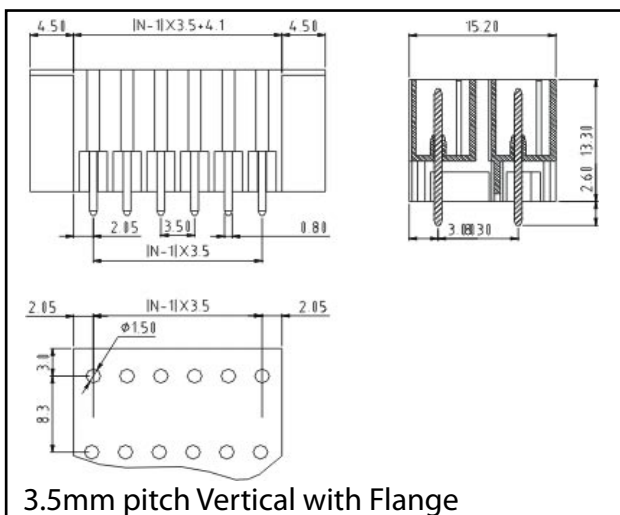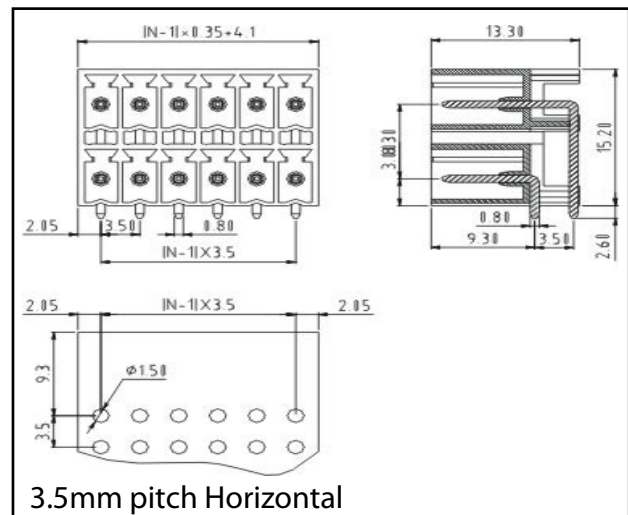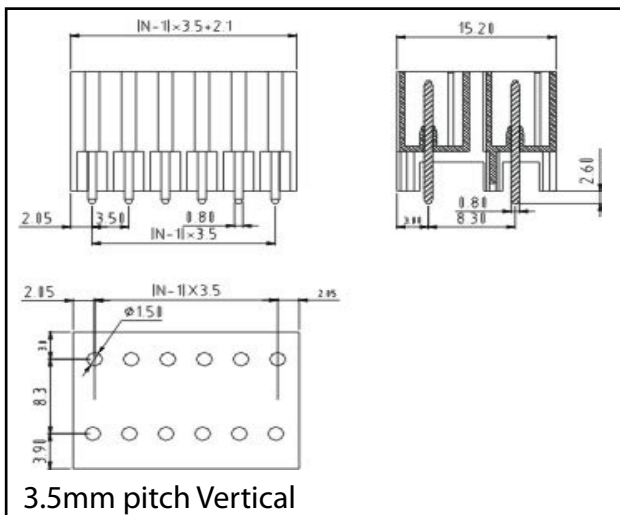

HMSD Series

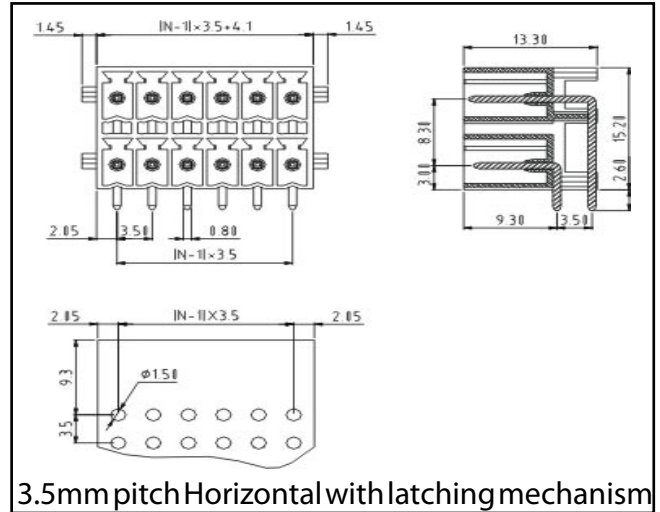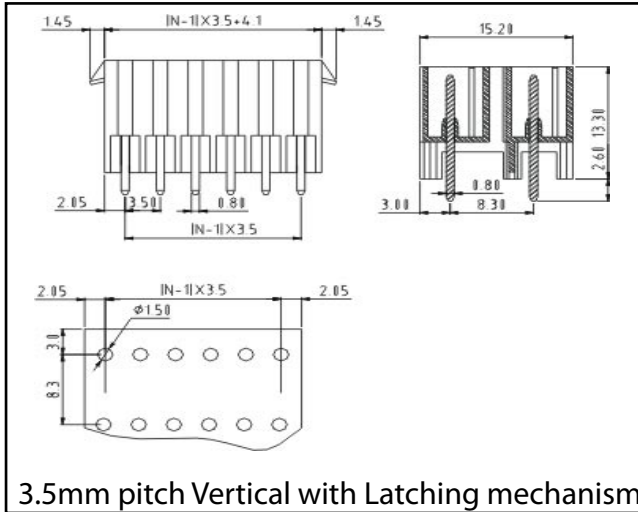

ORDERING CODES

| | | | | | |
|---|----------------------------|--|-------------------------|--------------------|--------------------|
| HMSD | XX Poles | X Mounting Type | X Open/Closed | X Pitch | X Colour |
| 04 2*2Contacts 06 2*3 Contacts 30 2*24 Contacts | 0 Vertical 9 Horizontal | P Closed V Flange X Latching mechanism | 8 3.5mm | N Black V Green | |