CFB Series

2.00mm Pitch | Female Pin Header | Dual Row | S.M.T. | Locating peg

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40˚C to +105˚C

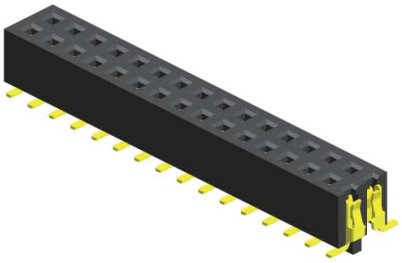

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

Mating with



CMA6S201/02 CMA6S203/04 CMA6S212/16 CMA6S215 CMA6N201/02

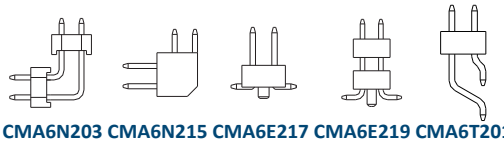

CMA6N203 CMA6N215 CMA6E217 CMA6E219 CMA6T201



CMA6S213 CMA6E214

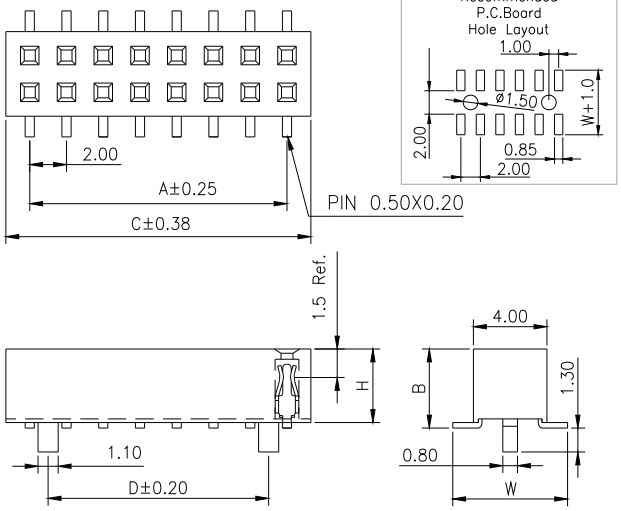

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

No. of Pins/Row	Dimension Information A	C	D
03	4.00	6.60	2.00
04	6.00	8.60	4.00
05	8.00	10.60	6.00
06	10.00	12.60	8.00
07	12.00	14.60	10.00
08	14.00	16.60	12.00
09	16.00	18.60	14.00
10	18.00	20.60	16.00

No. of Pins/Row	Dimension Information A	C	D
11	20.00	22.60	18.00
12	22.00	24.60	20.00
13	24.00	26.60	22.00
14	26.00	28.60	24.00
15	28.00	30.60	26.00
16	30.00	32.60	28.00
17	32.00	34.60	30.00
18	34.00	36.60	32.00
19	36.00	38.60	34.00
20	38.00	40.60	36.00

No. of Pins/Row	Dimension Information A	C	D
21	40.00	42.60	38.00
22	42.00	44.60	40.00
23	44.00	46.60	42.00
24	46.00	48.60	44.00
25	48.00	50.60	46.00
26	50.00	52.60	48.00
27	52.00	54.60	50.00
28	54.00	56.60	52.00
29	56.00	58.60	54.00
30	58.00	60.60	56.00

No. of Pins/Row	Dimension Information A	C	D
31	60.00	62.60	58.00
32	62.00	64.60	60.00
33	64.00	66.60	62.00
34	66.00	68.60	64.00
35	68.00	70.60	66.00
36	70.00	72.60	68.00
37	72.00	74.60	70.00
38	74.00	76.60	72.00
39	76.00	78.60	74.00
40	78.00	80.60	76.00

Ordering Codes

C FB6E2XX - XX XX X XXX X X A X

Height Option (H)
- 08 : H=4.30
- 10 : H=4.00

No Of Pins Per Row
03 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Pin Length (C/D)

CFB6E208	001	: B=4.50 / W=5.60
CFB6E210	002	: B=4.30 / W=6.25

For special length requirement
Please contact our sales personnel

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

Due to technical progress, all designs, specifications and components are subject to change without notice.

Hitaltech UK
(Sales UK, Ireland & USA)
T: +44 1253 899910
E: uksales@hitaltech.co.uk
www.hitaltech.com

Hitaltech SA/NV
(Sales Benelux, France, Italy & Rest of the World)
T: +32 2725 2075
E: info@hitaltech.com
www.hitaltech.com

www.conex-it.com