


Specifications



Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials


Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

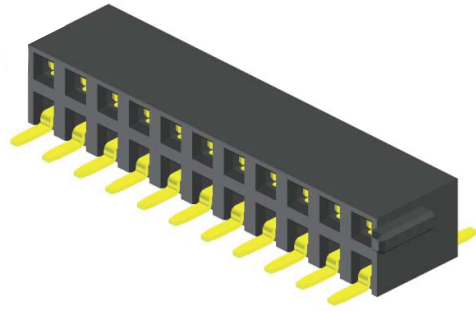

Mating with

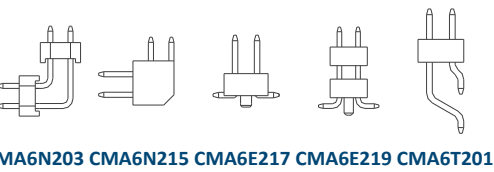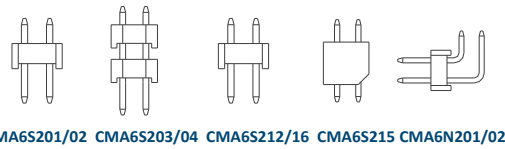

P.S. : Suggested mating pin length : 3.0 ~ 4.8 mm

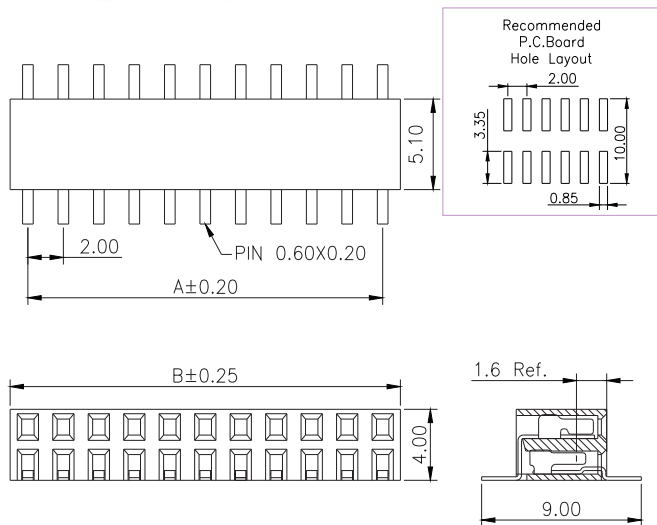

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C			A	C			A	C	
				11	20.00	22.00		21	40.00	42.00	
				12	22.00	24.00		22	42.00	44.00	
03	4.00	6.00		13	24.00	26.00		23	44.00	46.00	
04	6.00	8.00		14	26.00	28.00		24	46.00	48.00	
05	8.00	10.00		15	28.00	30.00		25	48.00	50.00	
06	10.00	12.00		16	30.00	32.00					
07	12.00	14.00		17	32.00	34.00					
08	14.00	16.00		18	34.00	36.00					
09	16.00	18.00		19	36.00	38.00					
10	18.00	20.00		20	38.00	40.00					

Ordering Codes

C FB6E219 - XX XX X 001 X X A X

No Of Pins Per Row
03 - 25

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.