CFB Series

2.00mm Pitch | Female Pin Header | Single Row | Dip

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40˚C to +105˚C

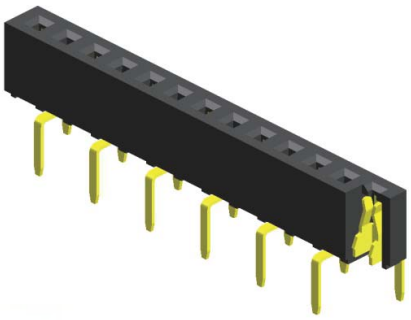

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

Mating with

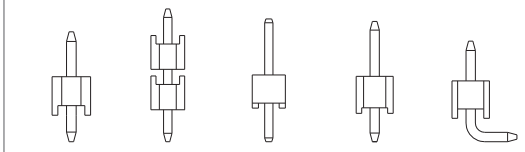

CMA6S101/02 CMA6S103/04 CMA6S110/11 SMA6S113 CMA6N101/02

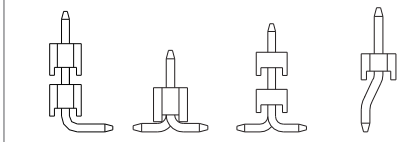

CMA6N106 CMA6E101/02 CMA6E104 CMA6T102

P.S. : Suggested mating pin length : 2.5 ~ 4.0 mm



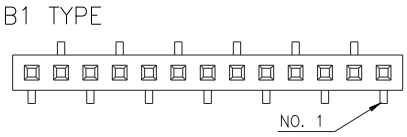





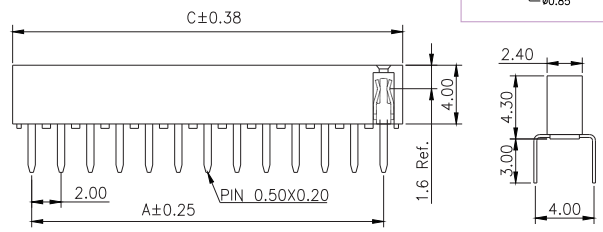

No. of Pins/Row	Dimension Information A	C
02	2.00	4.60
03	4.00	6.60
04	6.00	8.60
05	8.00	10.60
06	10.00	12.60
07	12.00	14.60
08	14.00	16.60
09	16.00	18.60
10	18.00	20.60

No. of Pins/Row	Dimension Information A	C
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60
17	32.00	34.60
18	34.00	36.60
19	36.00	38.60
20	38.00	40.60

No. of Pins/Row	Dimension Information A	C
21	40.00	42.60
22	42.00	44.60
23	44.00	46.60
24	46.00	48.60
25	48.00	50.60
26	50.00	52.60
27	52.00	54.60
28	54.00	56.60
29	56.00	58.60
30	58.00	60.60

No. of Pins/Row	Dimension Information A	C
31	60.00	62.60
32	62.00	64.60
33	64.00	66.60
34	66.00	68.60
35	68.00	70.60
36	70.00	72.60
37	72.00	74.60
38	74.00	76.60
39	76.00	78.60
40	78.00	80.60

Ordering Codes

C FB6U101 - XX XX X XXX X X A X

No Of Pins Per Row
02 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Pin Length (C/D)
003 : B1 Type
004 : B2 Type

For special length requirement
Please contact our sales personnel

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

Due to technical progress, all designs, specifications and components are subject to change without notice.

Hitaltech UK
(Sales UK, Ireland & USA)
T: +44 1253 899910
E: uksales@hitaltech.co.uk
www.hitaltech.com

Hitaltech SA/NV
(Sales Benelux, France, Italy & Rest of the World)
T: +32 2725 2075
E: info@hitaltech.com
www.hitaltech.com

www.conex-it.com