


Specifications


| | |
|---------------------------|-----------------|
| Current Rating : | 2.0 Ampere |
| Insulation Resistance : | 1000 MΩ Min |
| Dielectric Withstanding : | 500V AC |
| Contact Resistance : | 20 mΩ Max |
| Operating Temperature : | -40°C to +105°C |

Materials


| | |
|-----------------------|---|
| Contact Material : | Phosphor Bronze |
| Insulation Material : | High Temperature Thermoplastic, 94V-0 Nylon |

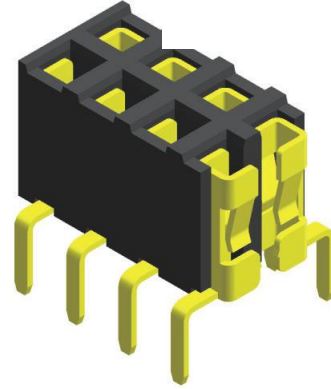

Mating with




CMA6S201/02 CMA6S203/04 CMA6S212/16 CMA6S215 CMA6N201/02

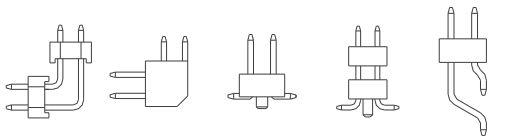

CMA6N203 CMA6N215 CMA6E217 CMA6E219 CMA6T201

P.S. : Suggested mating pin length : > 4.5 mm

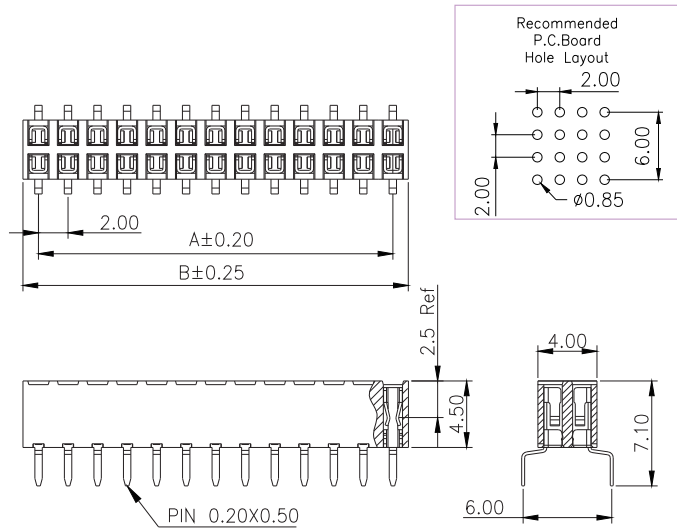

| No. of Pins/Row | Dimension Information | | | No. of Pins/Row | Dimension Information | | | No. of Pins/Row | Dimension Information | | | No. of Pins/Row | Dimension Information | | |
|-----------------|-----------------------|-------|--|-----------------|-----------------------|-------|--|-----------------|-----------------------|-------|--|-----------------|-----------------------|-------|--|
| | A | C | | | A | C | | | A | C | | | A | C | |
| 02 | 2.00 | 4.10 | | 11 | 20.00 | 22.10 | | 21 | 40.00 | 42.10 | | 31 | 60.00 | 62.10 | |
| 03 | 4.00 | 6.10 | | 12 | 22.00 | 24.10 | | 22 | 42.00 | 44.10 | | 32 | 62.00 | 64.10 | |
| 04 | 6.00 | 8.10 | | 13 | 24.00 | 26.10 | | 23 | 44.00 | 46.10 | | 33 | 64.00 | 66.10 | |
| 05 | 8.00 | 10.10 | | 14 | 26.00 | 28.10 | | 24 | 46.00 | 48.10 | | 34 | 66.00 | 68.10 | |
| 06 | 10.00 | 12.10 | | 15 | 28.00 | 30.10 | | 25 | 48.00 | 50.10 | | 35 | 68.00 | 70.10 | |
| 07 | 12.00 | 14.10 | | 16 | 30.00 | 32.10 | | 26 | 50.00 | 52.10 | | 36 | 70.00 | 72.10 | |
| 08 | 14.00 | 16.10 | | 17 | 32.00 | 34.10 | | 27 | 52.00 | 54.10 | | 37 | 72.00 | 74.10 | |
| 09 | 16.00 | 18.10 | | 18 | 34.00 | 36.10 | | 28 | 54.00 | 56.10 | | 38 | 74.00 | 76.10 | |
| 10 | 18.00 | 20.10 | | 19 | 36.00 | 38.10 | | 29 | 56.00 | 58.10 | | 39 | 76.00 | 78.10 | |
| | | | | 20 | 38.00 | 40.10 | | 30 | 58.00 | 60.10 | | 40 | 78.00 | 80.10 | |

Ordering Codes

C FB6U202 - XX XX X 001 X X A X

No Of Pins Per Row
02 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.