


## Specifications


Current Rating : 3.0 Ampere  
 Insulation Resistance : 1000 MΩ Min  
 Dielectric Withstanding : 600V AC  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature : -40°C to +105°C

## Materials


Contact Material : Phosphor Bronze  
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

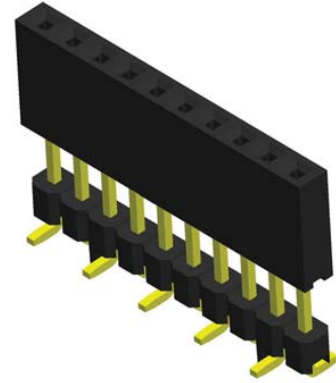

## Mating with

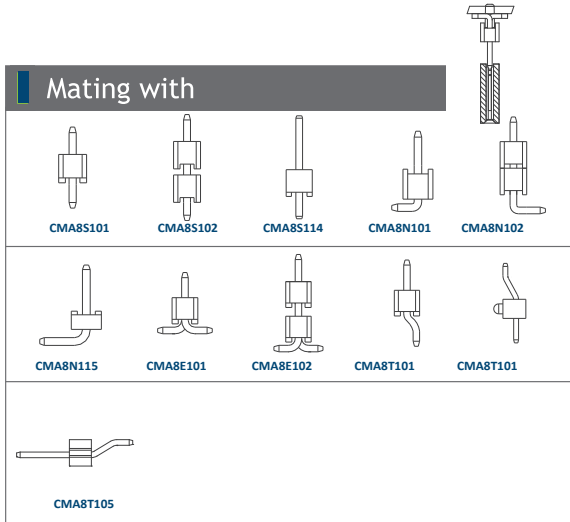

P.S. : Suggested mating pin length : 4.5 ~ 6.0 mm

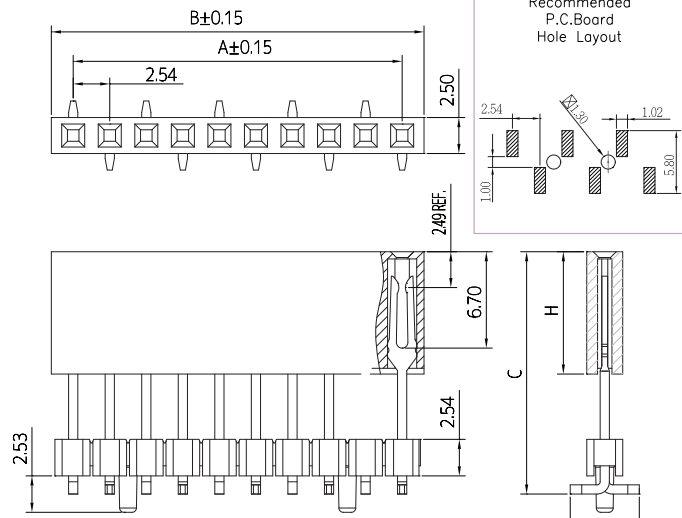

No. of Pins/Row	Dimension Information		
	A	B	
10	22.86	25.90	

## Ordering Codes

**C FB8E125 - XX XX X XXX X X A X**

**No Of Pins Per Row** : 10  
**Plating Code** : 03 - Tin, 06 - Gold Flash, 09 - Gold Flash/ Tin  
**Material Code** : B - NYLON  
**Pin Length (C/D)** : 001 : C=18.64 / B=4.80  
**Colour Code** : N - Black  
**Post** : W - W/O Post  
**Packing Code** : C - Tube

For special length requirement  
 Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.