


Specifications


Current Rating : 3.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 600V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials



Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

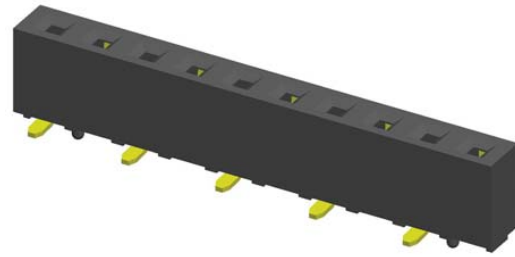

Mating with

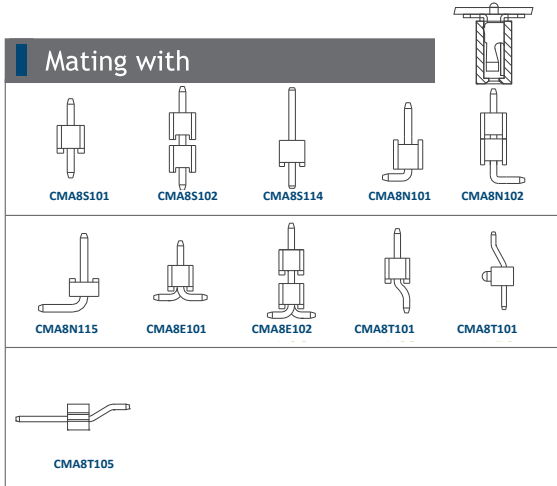

P.S. : Suggested mating pin length : 3.0 ~ 4.5 mm

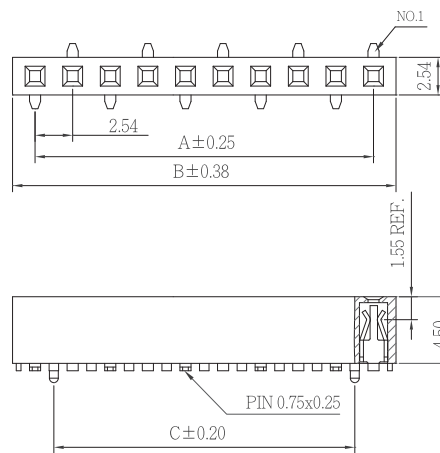

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
03	5.08	8.12	2.54	11	25.40	28.44	22.86	21	50.80	53.84	48.26	31	76.20	79.24	73.66
04	7.62	10.66	5.88	12	27.94	30.98	25.40	22	53.34	56.38	50.80	32	78.74	81.78	76.20
05	10.16	13.20	7.62	13	30.48	33.52	27.94	23	55.88	58.92	53.34	33	81.28	84.32	78.74
06	12.70	15.74	10.16	14	33.02	36.06	30.48	24	58.42	61.46	55.88	34	83.82	86.86	81.28
07	15.24	18.28	12.70	15	35.56	38.60	33.02	25	60.96	64.00	58.42	35	86.36	89.40	83.82
08	17.78	20.82	15.24	16	38.10	41.14	35.56	26	63.50	66.54	60.96	36	88.90	91.94	86.36
09	20.32	23.36	17.78	17	40.64	43.68	38.10	27	66.04	69.08	63.50	37	91.44	94.48	88.90
10	22.86	25.90	20.32	18	43.18	46.22	40.64	28	68.58	71.62	66.04	38	93.98	97.02	91.44
				19	45.72	48.76	43.18	29	71.12	74.16	68.58	39	96.52	99.56	93.98
				20	48.26	51.30	45.72	30	73.66	76.70	71.12	40	99.06	102.10	96.52

Ordering Codes

C FB8E129 - XX XX X XXX X X A X

No Of Pins Per Row
03 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Pin Length (C/D)
001 : D=4.40

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.