


Specifications





Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

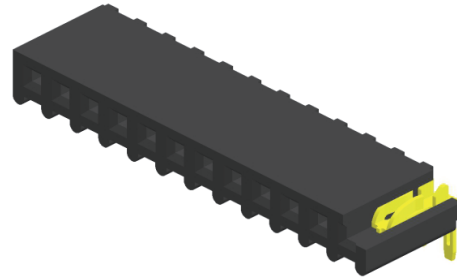

Mating with

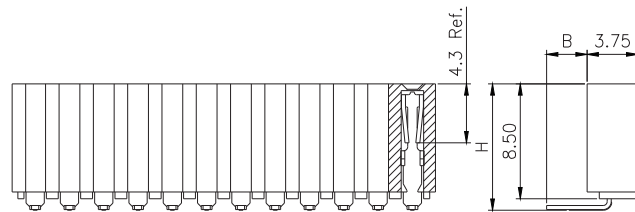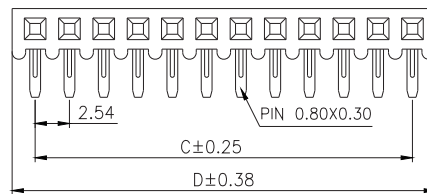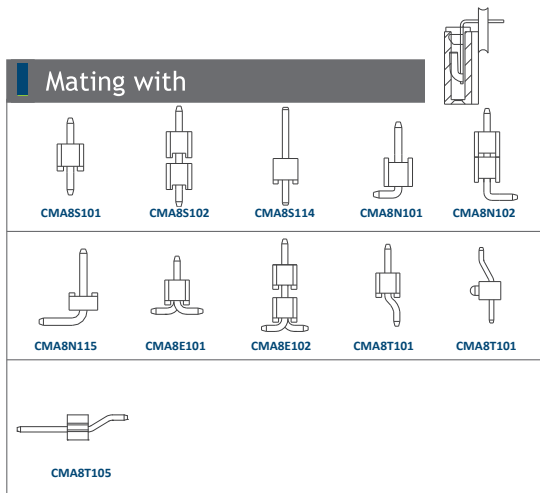

P.S. : Suggested mating pin length : 6.0 ~ 8.0 mm

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	2.54	5.88		11	25.40	28.74		21	50.80	54.14		31	76.20	79.54	
03	5.08	8.42		12	27.94	31.28		22	53.34	56.68		32	78.74	82.08	
04	7.62	10.96		13	30.48	33.82		23	55.88	59.22		33	81.28	84.62	
05	10.16	13.50		14	33.02	36.36		24	58.42	61.76		34	83.82	87.16	
06	12.70	16.04		15	35.56	38.90		25	60.96	64.30		35	86.36	89.70	
07	15.24	18.58		16	38.10	41.44		26	63.50	66.84		36	88.90	92.24	
08	17.78	21.12		17	40.64	43.98		27	66.04	69.38		37	91.44	94.78	
09	20.32	23.66		18	43.18	46.52		28	68.58	71.92		38	93.98	97.32	
10	22.86	26.20		19	45.72	49.06		29	71.12	74.46		39	96.52	99.86	
				20	48.26	51.60		30	73.66	77.00		40	99.06	102.40	

Ordering Codes

C FB8N107 - XX XX X XXX X X A X

No Of Pins Per Row
02 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Pin Length (C/D)
001 : B=3.00 / H=9.35

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.