


Specifications


Current Rating : 3.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 600V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials




Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 PBT

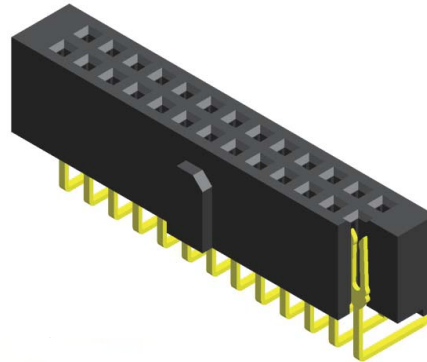

Mating with

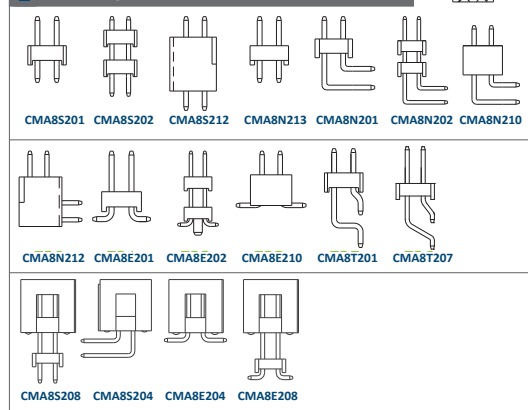

P.S. : Suggested mating pin length : 4.0 ~ 6.0 mm

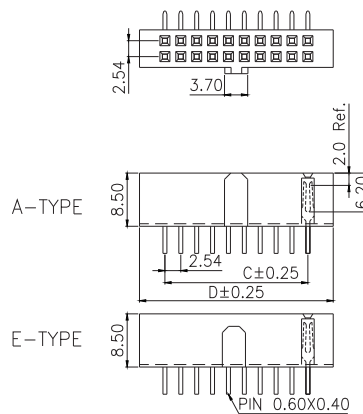

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
03	5.08	12.50	11	25.40	32.82	21	50.80	58.22	31	76.20	83.62
04	7.62	15.04	12	27.94	35.36	22	53.34	60.76	32	78.74	86.16
05	10.16	17.58	13	30.48	37.90	23	55.88	63.30	33	81.28	88.70
06	12.70	20.12	14	33.02	40.44	24	58.42	65.84	34	83.82	91.24
07	15.24	22.66	15	35.56	42.98	25	60.96	68.38	35	86.36	93.78
08	17.78	25.20	16	38.10	45.52	26	63.50	70.92	36	88.90	96.32
09	20.32	27.74	17	40.64	48.06	27	66.04	73.46			
10	22.86	30.28	18	43.18	50.60	28	68.58	76.00			
			19	45.72	53.14	29	71.12	78.54			
			20	48.26	55.68	30	73.66	81.08			

Ordering Codes

C FB8N217 - XX XX X XXX X X A X

No Of Pins Per Row
03 - 36

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
A - PBT

Pin Length (C/D)
001 : A=10.10 / B=3.00 (A Type)
001 : A=10.10 / B=3.00 (E Type)

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.