


## Specifications



Current Rating : 3.0 Ampere  
 Insulation Resistance : 1000 MΩ Min  
 Dielectric Withstanding : 600V AC  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature : -40°C to +105°C

## Materials

Contact Material : Phosphor Bronze  
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

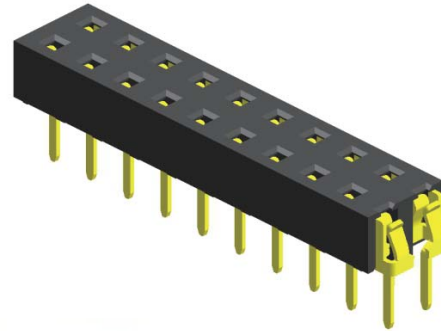

## Mating with

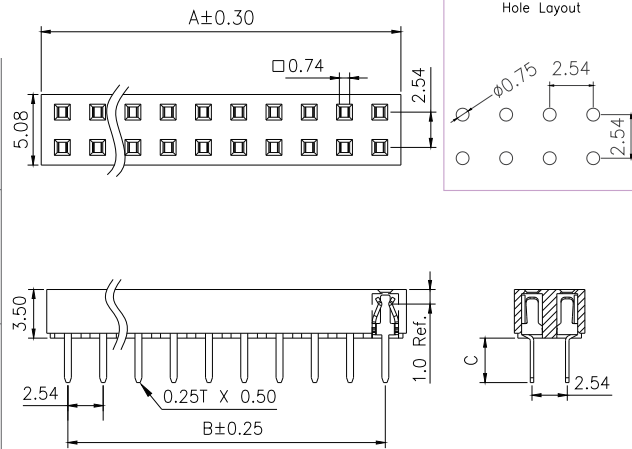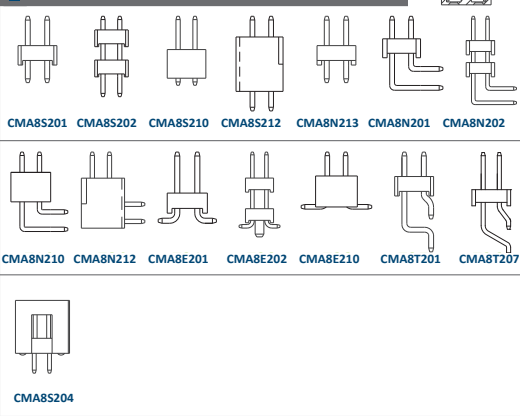

P.S. : Suggested mating pin length : 3.0 ~ 4.5 mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	5.58	2.54	11	28.44	25.40	21	53.84	50.80	31	79.24	76.20
03	8.12	5.08	12	30.98	27.94	22	56.38	53.34	32	81.78	78.74
04	10.66	7.62	13	33.52	30.48	23	58.92	55.88	33	84.32	81.28
05	13.20	10.16	14	36.06	33.02	24	61.46	58.42	34	86.86	83.82
06	15.74	12.70	15	38.60	35.56	25	64.00	60.96	35	89.40	86.36
07	18.28	15.24	16	41.14	38.10	26	66.54	63.50	36	91.94	88.90
08	20.82	17.78	17	43.68	40.64	27	69.08	66.04	37	94.48	91.44
09	23.36	20.32	18	46.22	43.18	28	71.62	68.58	38	97.02	93.98
10	25.90	22.86	19	48.76	45.72	29	74.16	71.12	39	99.56	96.52
			20	51.30	48.26	30	76.70	73.66	40	102.10	99.06

## Ordering Codes

**C FB8S211 - XX XX X XXX X X A X**

**No Of Pins Per Row**  
 02 - 40

**Plating Code**  
 03 - Tin  
 06 - Gold Flash  
 09 - Gold Flash/ Tin

**Material Code**  
 B - NYLON

**Pin Length (C/D)**  
 001 : C=3.10

**Colour Code**  
 N - Black

**Post**  
 W - W/O Post

**Packing Code**  
 C - Tube

For special length requirement  
 Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.