


Specifications

Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials






Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 LCP

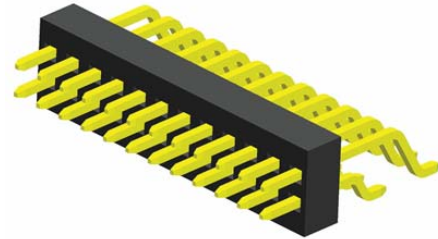

Mating with



CFB3N211

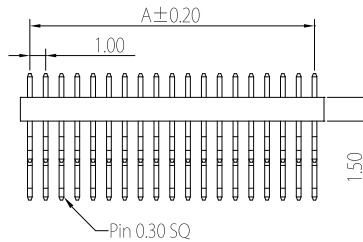

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B	
02	1.00	2.20		11	10.00	11.20	
03	2.00	3.20		12	11.00	12.20	
04	3.00	4.20		13	12.00	13.20	
05	4.00	5.20		14	13.00	14.20	
06	5.00	6.20		15	14.00	15.20	
07	6.00	7.20					
08	7.00	8.20					
09	8.00	9.20					
10	9.00	10.20					

Ordering Codes

C MA3T201 - XX

No Of Pins Per Row
02 - 15

Plating Code
03 - Tin
06 - Gold Flash

XX

Material Code
C - LCP

X

XXX

Pin Length (C/D)

002 : C=1.50 / D=2.60 / E=5.00
 004 : C=2.50 / D=2.60 / E=5.00

For special length requirement
Please contact our sales personnel

X

Colour Code
N - Black

X

Post
W - W/O Post

A

X

Packing Code
C - Tube

Due to technical progress, all designs, specifications and components are subject to change without notice.