


## Specifications


Current Rating : 1.0 Ampere  
 Insulation Resistance : 1000 MΩ Min  
 Dielectric Withstanding : 300V AC  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature : -40°C to +105°C

## Materials




Contact Material : Brass  
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

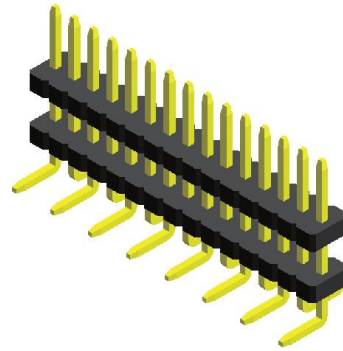

## Mating with



CFB5S101 CFB5S102 CFB5S113

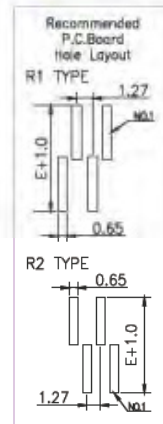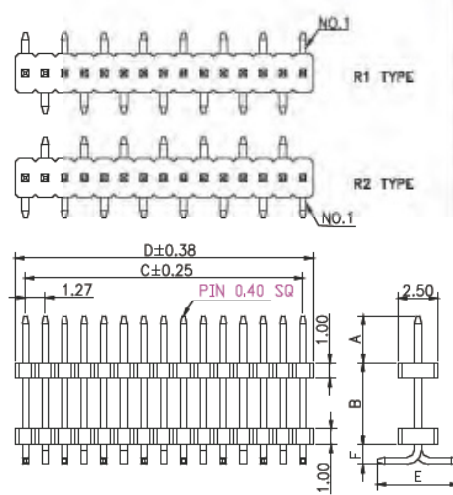

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
03	2.54	3.81		11	12.70	13.97		21	25.40	26.67		31	38.10	39.37	
04	3.81	5.08		12	13.97	15.24		22	26.67	27.94		32	39.37	40.64	
05	5.08	6.35		13	15.24	16.51		23	27.94	29.21		33	40.64	41.91	
06	6.35	7.62		14	16.51	17.78		24	29.21	30.48					
07	7.62	8.89		15	17.78	19.05		25	30.48	31.75					
08	8.89	10.16		16	19.05	20.32		26	31.75	33.02					
09	10.16	11.43		17	20.32	21.59		27	33.02	34.29					
10	11.43	12.70		18	21.59	22.86		28	34.29	35.56					
				19	22.86	24.13		29	35.56	36.83					
				20	24.13	25.40		30	36.83	38.10					

## Ordering Codes

**C MA5E132 - XX XX X XXX X X B X**

**No Of Pins Per Row**  
02 - 33

**Plating Code**  
03 - Tin  
06 - Gold Flash  
09 - Gold Flash/ Tin

**Material Code**  
C - LCP

**Pin Length (C/D)**  
004 : A=3.50/B=4.00/E=5.50/F=2.00 (R2)  
005 : A=3.00/B=2.00/E=4.50/F=0.68 (R1)  
For special length requirement  
Please contact our sales personnel

**Colour Code**  
N - Black

**Post**  
W - W/O Post

**Packing Code**  
C - Tube

Due to technical progress, all designs, specifications and components are subject to change without notice.