


## Specifications


Current Rating : 1.0 Ampere  
 Insulation Resistance : 1000 MΩ Min  
 Dielectric Withstanding : 300V AC  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature : -40°C to +105°C

## Materials

Contact Material : Brass  
 Insulation Material : High Temperature Thermoplastic, 94V-0 LCP




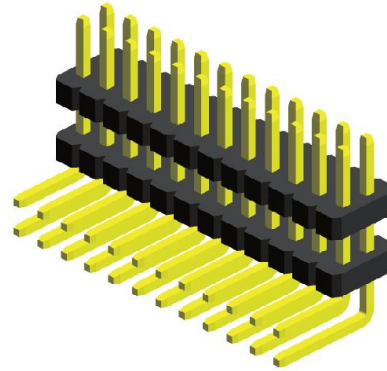


## Mating with

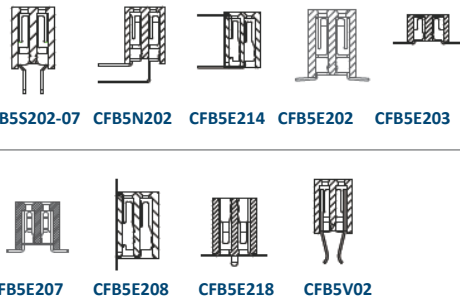

CFB5S202-07 CFB5N202 CFB5E214 CFB5E202 CFB5E203

CFB5E207 CFB5E208 CFB5E218 CFB5V02

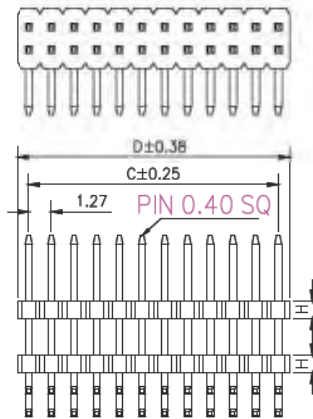

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	1.27	2.54	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37
03	2.54	3.81	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64
04	3.81	5.08	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91
05	5.08	6.35	14	16.51	17.78	24	29.21	30.48			
06	6.35	7.62	15	17.78	19.05	25	30.48	31.75			
07	7.62	8.89	16	19.05	20.32	26	31.75	33.02			
08	8.89	10.16	17	20.32	21.59	27	33.02	34.29			
09	10.16	11.43	18	21.59	22.86	28	34.29	35.56			
10	11.43	12.70	19	22.86	24.13	29	35.56	36.83			
			20	24.13	25.40	30	36.83	38.10			

## Ordering Codes

**C MA5N XX - XX XX X XXX X X B X**

Height Option (H)  
 32 : H=1.00  
 33 : H=1.50

Material Code  
 C - LCP

Colour Code  
 N - Black

Post  
 W - W/O Post

Packing Code  
 C - Tube

Pin Length (C/D)  
 CMA5N232 014 : A=7.00/B=2.60/E=4.00/F=4.20  
 CMA5N233 007 : A=2.50/B=4.20/E=4.30/F=4.17

Plating Code  
 03 - Tin  
 06 - Gold Flash  
 09 - Gold Flash/ Tin

No Of Pins Per Row  
 02 - 33

For special length requirement

Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.