


Specifications


Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials


Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

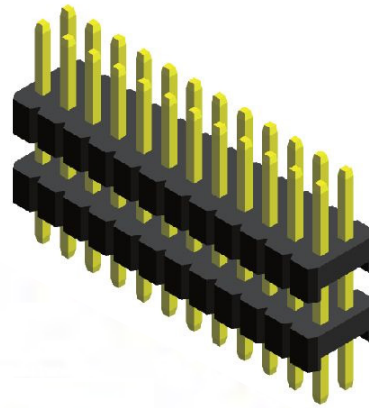




Mating with



CFB5S202-07 CFB5N202 CFB5E214 CFB5E203 CFB5E203



CFB5E207 CFB5E208 CFB5E218 CFB5V02

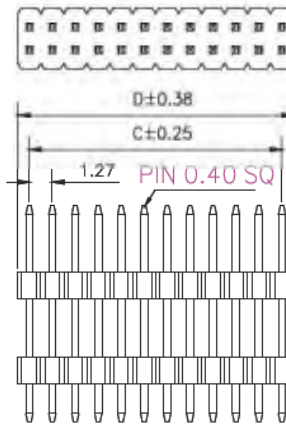

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	1.27	2.54		11	12.70	13.97		21	25.40	26.67		31	38.10	39.37	
03	2.54	3.81		12	13.97	15.24		22	26.67	27.94		32	39.37	40.64	
04	3.81	5.08		13	15.24	16.51		23	27.94	29.21		33	40.64	41.91	
05	5.08	6.35		14	16.51	17.78		24	29.21	30.48					
06	6.35	7.62		15	17.78	19.05		25	30.48	31.75					
07	7.62	8.89		16	19.05	20.32		26	31.75	33.02					
08	8.89	10.16		17	20.32	21.59		27	33.02	34.29					
09	10.16	11.43		18	21.59	22.86		28	34.29	35.56					
10	11.43	12.70		19	22.86	24.13		29	35.56	36.83					
				20	24.13	25.40		30	36.83	38.10					

Ordering Codes

C MA5S XX - XX XX X XXX X X B X

Height Option (H) Standard
 30 : H= 3.00 31 : H= 2.50
 Height Option (H) Selective
 32 : H= 1.00
 33 : H= 1.50
 35 : H= 2.00

No Of Pins Per Row
02 - 33

Material Code
C - LCP

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Pin Length (C/D)
 CMA5S230 002 : A=1.90 / B=2.60 / E=9.90
 CMA5S231 020 : A=2.80 / B=3.00 / E=6.20

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.