

Specifications


Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials


Contact Material : Brass
 Insulation Material : High Temperature Thermoplastic, 94V-0 LCP






Mating with

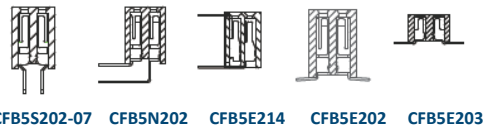

CFB5S202-07 CFB5N202 CFB5E214 CFB5E202 CFB5E203

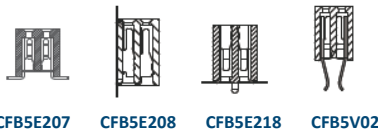

CFB5E207 CFB5E208 CFB5E218 CFB5V02

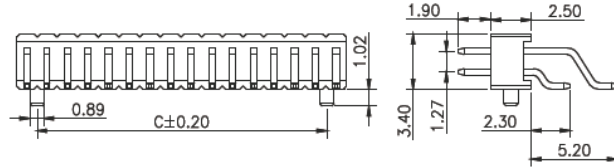

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
03	2.54	3.81	1.27	11	12.70	13.97	11.43	21	25.40	26.67	24.13	31	38.10	39.37	36.83
04	3.81	5.08	2.54	12	13.97	15.24	12.70	22	26.67	27.94	25.40	32	39.37	40.64	38.10
05	5.08	6.35	3.81	13	15.24	16.51	13.97	23	27.94	29.21	26.67	33	40.64	41.91	39.37
06	6.35	7.62	5.08	14	16.51	17.78	15.24	24	29.21	30.48	27.94				
07	7.62	8.89	6.35	15	17.78	19.05	16.51	25	30.48	31.75	29.21				
08	8.89	10.16	7.62	16	19.05	20.32	17.78	26	31.75	33.02	30.48				
09	10.16	11.43	8.89	17	20.32	21.59	19.05	27	33.02	34.29	31.75				
10	11.43	12.70	10.16	18	21.59	22.86	20.32	28	34.29	35.56	33.02				
				19	22.86	24.13	21.59	29	35.56	36.83	34.29				
				20	24.13	25.40	22.86	30	36.83	38.10	35.56				

Ordering Codes

C MA5T201 - XX XX X 001 X X B X

No Of Pins Per Row
03 - 33

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
C - LCP

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.