


Specifications



Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials

Contact Material : Brass
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

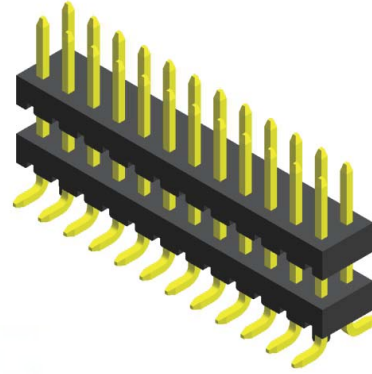

Mating with

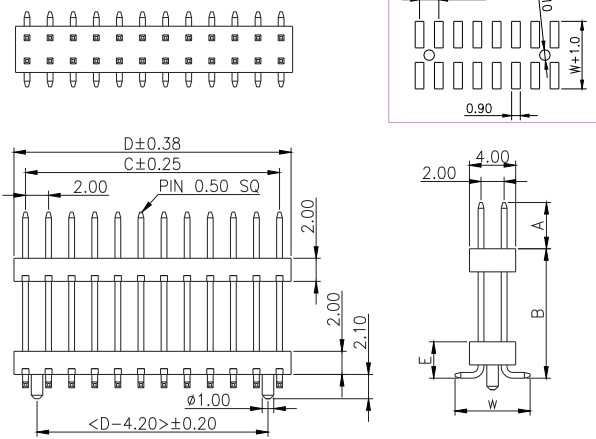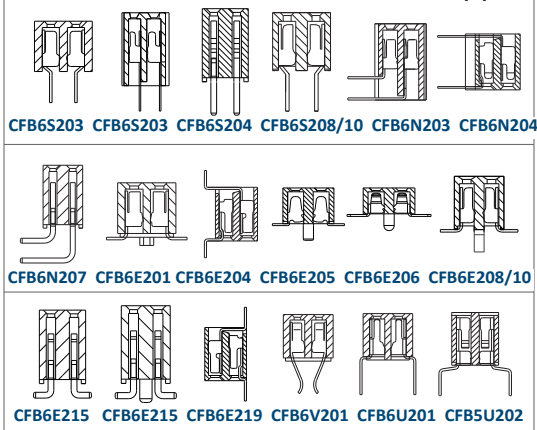

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	4.00	6.20	11	20.00	22.20	21	40.00	42.20	31	60.00	62.20
04	6.00	8.20	12	22.00	24.20	22	42.00	44.20	32	62.00	64.20
05	8.00	10.20	13	24.00	26.20	23	44.00	46.20	33	64.00	66.20
06	10.00	12.20	14	26.00	28.20	24	46.00	48.20	34	66.00	68.20
07	12.00	14.20	15	28.00	30.20	25	48.00	50.20	35	68.00	70.20
08	14.00	16.20	16	30.00	32.20	26	50.00	52.20	36	70.00	72.20
09	16.00	18.20	17	32.00	34.20	27	52.00	54.20	37	72.00	74.20
10	18.00	20.20	18	34.00	36.20	28	54.00	56.20	38	74.00	76.20
			19	36.00	38.20	29	56.00	58.20	39	76.00	78.20
			20	38.00	40.20	30	58.00	60.20	40	78.00	80.20

Ordering Codes

C MA6E219 - XX XX X XXX X X B X

No Of Pins Per Row
03 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Pin Length (C/D)
002 : A=4.00/B=4.60/E=2.60/W=6.50
003 : A=4.00/B=16.0/E=3.15/W=6.50

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.