


Specifications





Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials

Contact Material : Brass
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

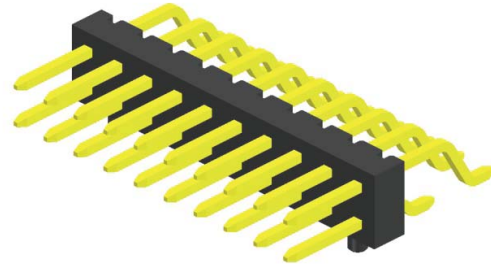

Mating with

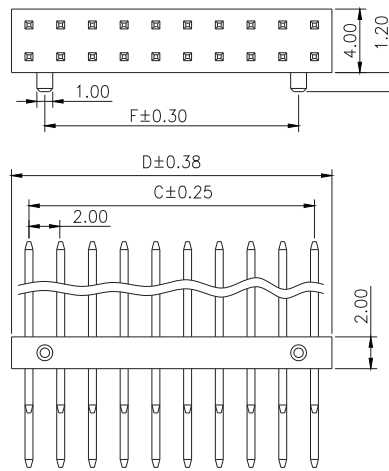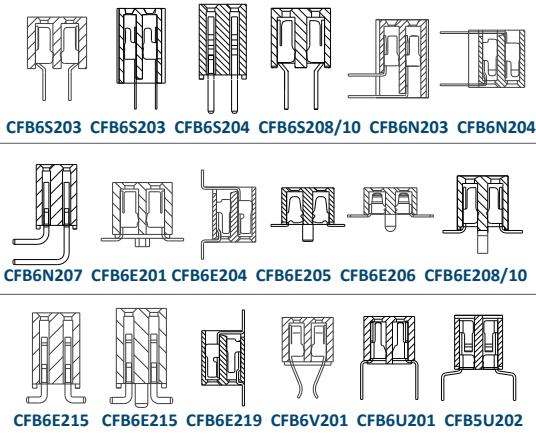

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D	F		C	D	F		C	D	F
				11	20.00	22.20	18.00	21	40.00	42.20	38.00
				12	22.00	24.20	20.00	22	42.00	44.20	40.00
03	4.00	6.20	2.00	13	24.00	26.20	22.00	23	44.00	46.20	42.00
04	6.00	8.20	4.00	14	26.00	28.20	24.00	24	46.00	48.20	44.00
05	8.00	10.20	6.00	15	28.00	30.20	26.00	25	48.00	50.20	46.00
06	10.00	12.20	8.00	16	30.00	32.20	28.00				
07	12.00	14.20	10.00	17	32.00	34.20	30.00				
08	14.00	16.20	12.00	18	34.00	36.20	32.00				
09	16.00	18.20	14.00	19	36.00	38.20	34.00				
10	18.00	20.20	16.00	20	38.00	40.20	36.00				

Ordering Codes

C MA6T201 - **XX** **XX** **X** **XXX** **X** **X** **B** **X**

No Of Pins Per Row: 03 - 25

Plating Code: 03 - Tin, 06 - Gold Flash, 09 - Gold Flash/ Tin

Material Code: B - NYLON

Colour Code: N - Black

Post: R - Round Post

Packing Code: C - Tube

Pin Length (C/D): 700 : A=4.00 / B=6.22 / E=3.43

For special length requirement
 Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.