


Specifications





Current Rating : 3.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 600V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials

Contact Material : Brass
 Insulation Material : High Temperature Thermoplastic, 94V-0 PBT

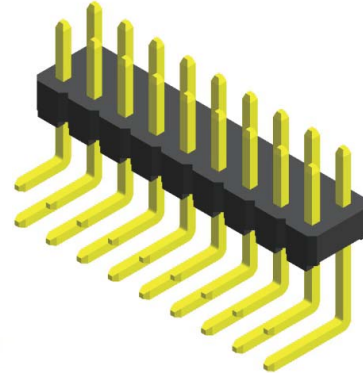

Mating with

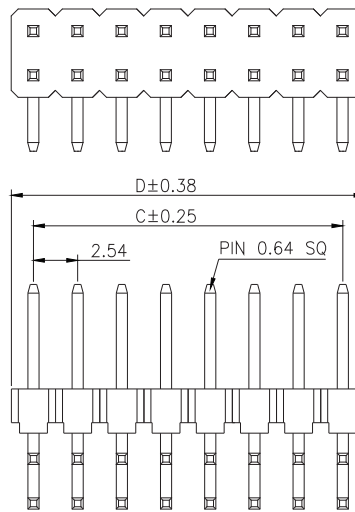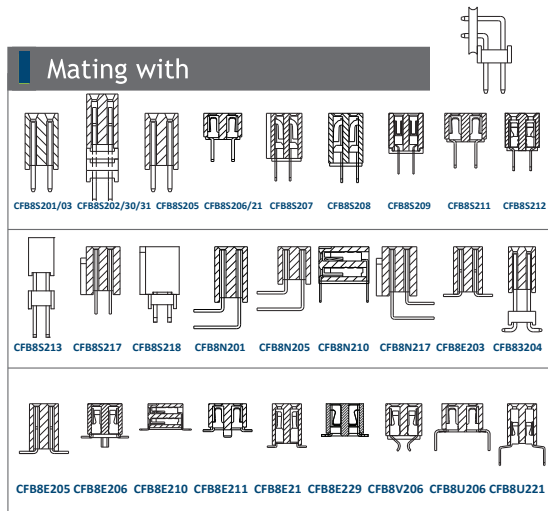

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D	
02	2.54	5.08		11	25.40	27.94		21	50.80	53.34	
03	5.08	7.62		12	27.94	30.48		22	53.34	55.88	
04	7.62	10.16		13	30.48	33.02		23	55.88	58.42	
05	10.16	12.70		14	33.02	35.56		24	58.42	60.96	
06	12.70	15.24		15	35.56	38.10		25	60.96	63.50	
07	15.24	17.78		16	38.10	40.64		26	63.50	66.04	
08	17.78	20.32		17	40.64	43.18		27	66.04	68.58	
09	20.32	22.86		18	43.18	45.72		28	68.58	71.12	
10	22.86	25.40		19	45.72	48.26		29	71.12	73.66	
				20	48.26	50.80		30	73.66	76.20	

Ordering Codes

C MA8N201 - XX XX X XXX X X B X

No Of Pins Per Row
02 - 30

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
A - PBT

Pin Length (C/D)
001 : A=6.00 / B=3.00 / H=1.20
005 : A=4.00 / B=3.10 / H=1.70

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.