


Specifications





Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT

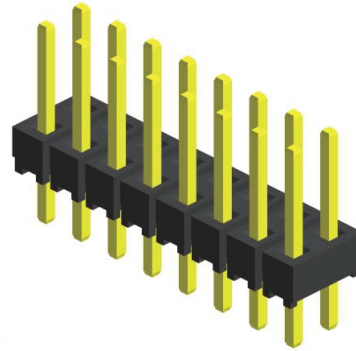

Mating with

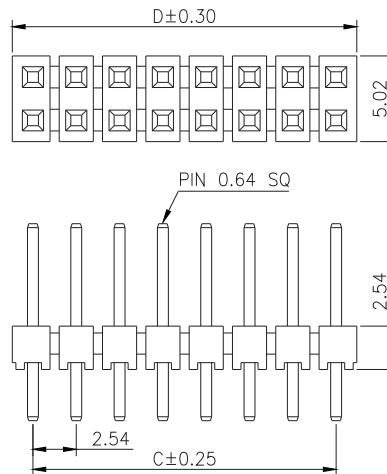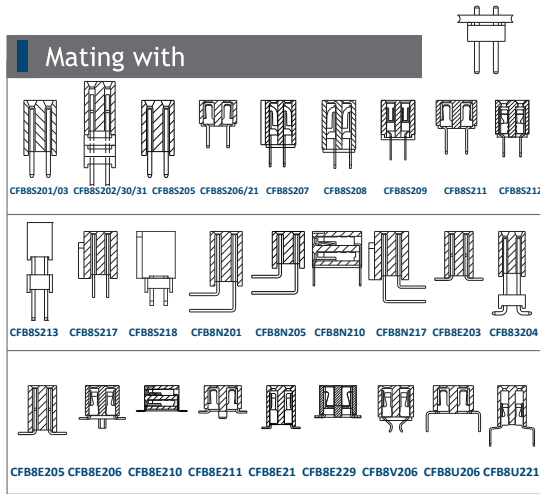

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
02	2.54	4.96	11	25.40	27.82	21	50.80	53.22
03	5.08	7.50	12	27.94	30.36	22	53.34	55.76
04	7.62	10.04	13	30.48	32.90	23	55.88	58.30
05	10.16	12.58	14	33.02	35.44	24	58.42	60.84
06	12.70	15.12	15	35.56	37.98	25	60.96	63.38
07	15.24	17.66	16	38.10	40.52	26	63.50	65.92
08	17.78	20.20	17	40.64	43.06	27	66.04	68.46
09	20.32	22.74	18	43.18	45.60	28	68.58	71.00
10	22.86	25.28	19	45.72	48.14	29	71.12	73.54
			20	48.26	50.68	30	73.66	76.08

Ordering Codes

C MA8N213 - XX XX X XXX X X B X

- No Of Pins Per Row**: 02 - 30
- Plating Code**: 03 - Tin, 06 - Gold Flash, 09 - Gold Flash/ Tin
- Material Code**: A - PBT
- Pin Length (C/D)**: 001 : A=6.00 / B=3.00, 005 : A=4.95 / B=3.45
- Colour Code**: N - Black
- Post**: W - W/O Post
- Packing Code**: A - Box

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.