



TECHNICAL INFORMATION


HST10 Series		
Pitch Available (mm)	3.5	5.00
Poles Available	2 - 24	2 - 24
Voltage Rating	300V	300V
Current Rating	10A	10A
Solid Wire (AWG)	16 - 26	16-26
Withstanding Voltage (KV)	1.6	1.6
Wire Strip Length (mm)	8~9	8~9

DRAWINGS


3.5mm Pitch

POLE		2	3	4	5	6	7	8	9	10	11	12	
DIM P		3.50	7.00	10.5	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	
DIM L		7.60	11.10	14.60	18.10	21.60	25.10	28.60	32.10	35.60	39.10	42.60	
Tol.		±0.10						±0.20					
POLE	13	14	15	16	17	18	19	20	21	22	23	24	
DIM P	42.00	45.500	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	
DIM L	46.10	49.60	53.10	56.60	60.10	63.60	67.10	70.60	74.10	77.60	81.10	84.60	
Tol.		±0.30						±0.40					



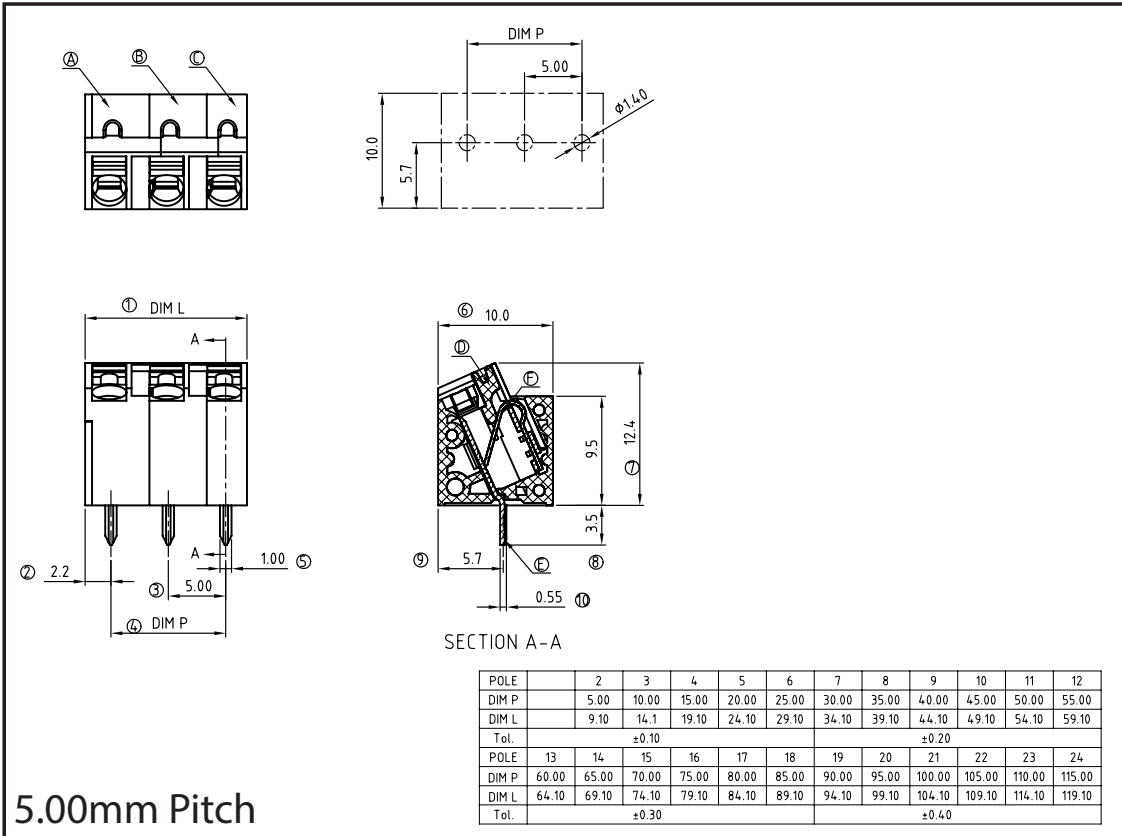

ORDERING CODES

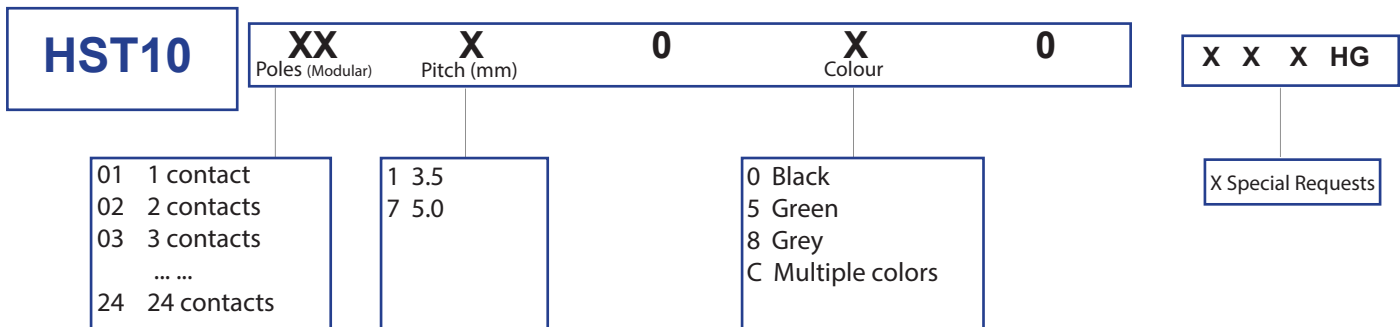

Hitaltech

A group of connecting technologies

PCB TERMINAL BLOCKS
& CONNECTORS

Screwless Terminal Block
HST10 Series



Hitaltech SA/NV

(Sales Benelux, France & Italy)

T: +32 2725 2075

E: europa-sales@hitaltech.com

Hitaltech UK Ltd

(Sales UK & Eire)

T: +44 (0) 1253 899910

E: uksales@hitaltech.com

Hitaltech GmbH

(Sales Germany)

T: +49 (0) 351 65 57 39 10

E: de-verkauf@hitaltech.com

Hitaltech Corp. Japan

(Sales Asia)

T: +81 (0)467 23 81 00

E: japan-sales@hitaltech.com

Hitaltech Headquarters

(Sales for the Rest of the World)

T: +32 2725 2075

E: europa-sales@hitaltech.com