


Specifications


Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials


Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

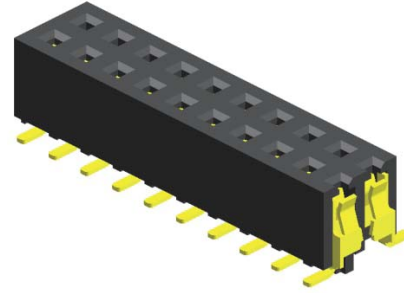

Mating with




CMA6S201/02 CMA6S203/04 CMA6S212/16 CMA6S215 CMA6N201/02

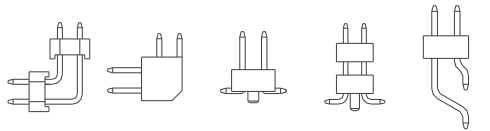

CMA6N203 CMA6N215 CMA6E217 CMA6E219 CMA6T201

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

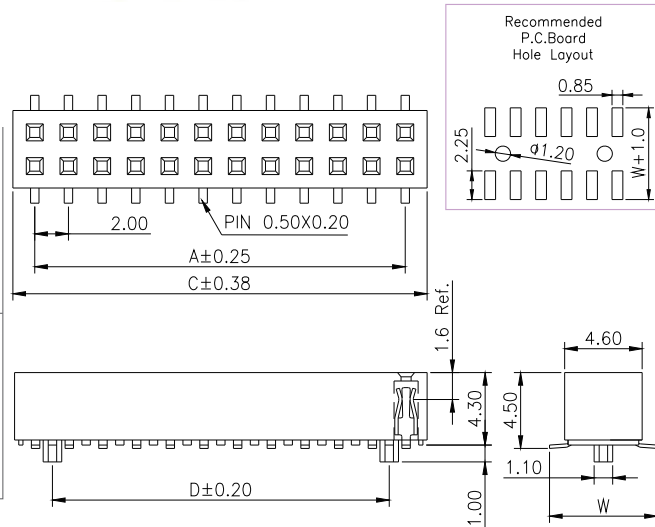

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C	D		A	C	D		A	C	D		A	C	D
03	4.00	6.60	2.00	11	20.00	22.60	18.00	21	40.00	42.60	38.00	31	60.00	62.60	58.00
04	6.00	8.60	4.00	12	22.00	24.60	20.00	22	42.00	44.60	40.00	32	62.00	64.60	60.00
05	8.00	10.60	6.00	13	24.00	26.60	22.00	23	44.00	46.60	42.00	33	64.00	66.60	62.00
06	10.00	12.60	8.00	14	26.00	28.60	24.00	24	46.00	48.60	44.00	34	66.00	68.60	64.00
07	12.00	14.60	10.00	15	28.00	30.60	26.00	25	48.00	50.60	46.00	35	68.00	70.60	66.00
08	14.00	16.60	12.00	16	30.00	32.60	28.00	26	50.00	52.60	48.00	36	70.00	72.60	68.00
09	16.00	18.60	14.00	17	32.00	34.60	30.00	27	52.00	54.60	50.00	37	72.00	74.60	70.00
10	18.00	20.60	16.00	18	34.00	36.60	32.00	28	54.00	56.60	52.00	38	74.00	76.60	72.00
				19	36.00	38.60	34.00	29	56.00	58.60	54.00	39	76.00	78.60	74.00
				20	38.00	40.60	36.00	30	58.00	60.60	56.00	40	78.00	80.60	76.00

Ordering Codes

C FB6E201 - XX XX X XXX X X A X

No Of Pins Per Row
03 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Pin Length (C/D)
002 : W=6.40
007 : W=7.20

Colour Code
N - Black

Post
S - Square Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.