


Specifications


Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials


Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

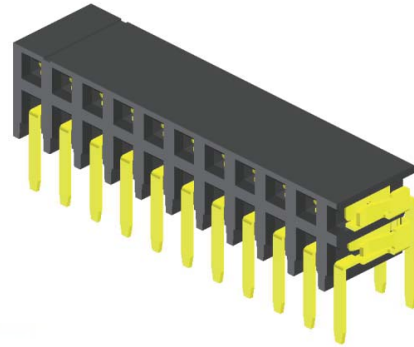

Mating with


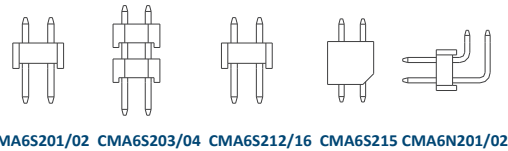


CMA6S201/02 CMA6S203/04 CMA6S212/16 CMA6S215 CMA6N201/02

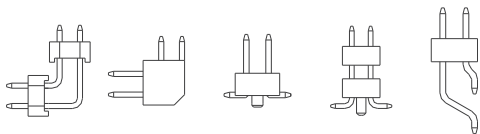

CMA6N203 CMA6N215 CMA6E217 CMA6E219 CMA6T201

P.S. : Suggested mating pin length : 3.0 ~ 4.8 mm

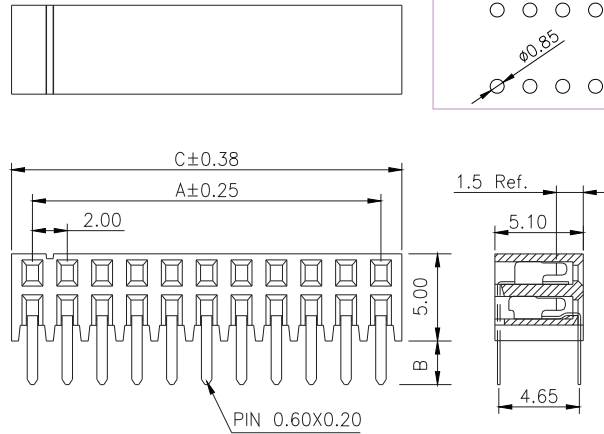

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C
02	2.00	4.40	11	20.00	22.40	21	40.00	42.40
03	4.00	6.40	12	22.00	24.40	22	42.00	44.40
04	6.00	8.40	13	24.00	26.40	23	44.00	46.40
05	8.00	10.40	14	26.00	28.40	24	46.00	48.40
06	10.00	12.40	15	28.00	30.40	25	48.00	50.40
07	12.00	14.40	16	30.00	32.40			
08	14.00	16.40	17	32.00	34.40			
09	16.00	18.40	18	34.00	36.40			
10	18.00	20.40	19	36.00	38.40			
			20	38.00	40.40			

Ordering Codes

C FB6N204 - XX XX X XXX X X A X

No Of Pins Per Row
02 - 25

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Pin Length (C/D)
001 : B=2.50

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.