


Specifications


Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials


Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT

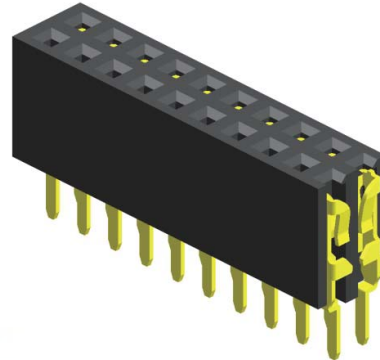

Mating with

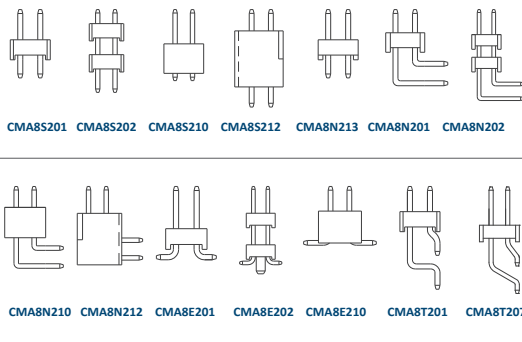

P.S. : Suggested mating pin length : 5.0 ~ 8.0 mm

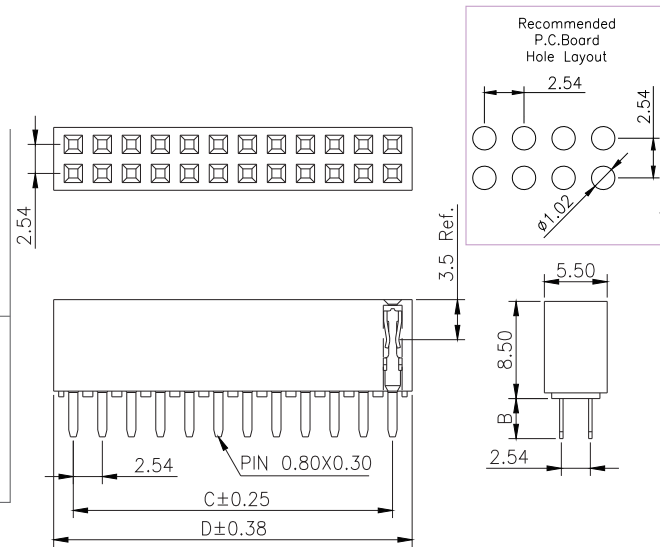

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.54	5.88	11	25.40	28.74	21	50.80	54.14	31	76.20	79.54
03	5.08	8.42	12	27.94	31.28	22	53.34	56.68	32	78.74	82.08
04	7.62	10.96	13	30.48	33.82	23	55.88	59.22	33	81.28	84.62
05	10.16	13.50	14	33.02	36.36	24	58.42	61.76	34	83.82	87.16
06	12.70	16.04	15	35.56	38.90	25	60.96	64.30	35	86.36	89.70
07	15.24	18.58	16	38.10	41.44	26	63.50	66.84	36	88.90	92.24
08	17.78	21.12	17	40.64	43.98	27	66.04	69.38	37	91.44	94.78
09	20.32	23.66	18	43.18	46.52	28	68.58	71.92	38	93.98	97.32
10	22.86	26.20	19	45.72	49.06	29	71.12	74.46	39	96.52	99.86
			20	48.26	51.60	30	73.66	77.00	40	99.06	102.40

Ordering Codes

C FB8S208 - XX XX X XXX X X A X

No Of Pins Per Row
02 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
A - PBT

Pin Length (C/D)
001 : B=3.50

Colour Code
N - Black

Post
W - W/O Post

Packing Code
C - Tube

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.