


Specifications






Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

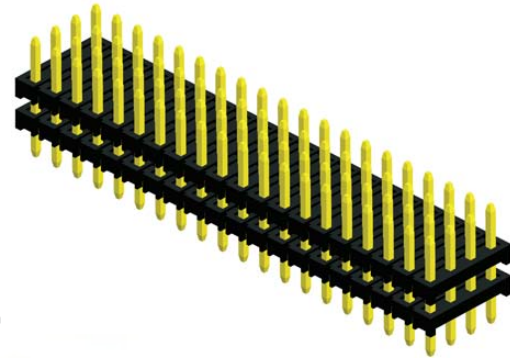

Mating with

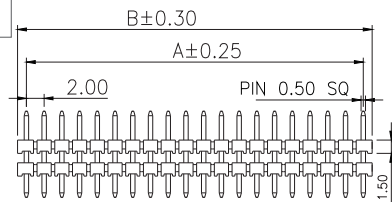

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Codes

C MA6S402 - XX XX X 002 X X A X

No Of Pins Per Row
02 - 40

Plating Code
03 - Tin
06 - Gold Flash
09 - Gold Flash/ Tin

Material Code
B - NYLON

Colour Code
N - Black

Post
W - W/O Post

Packing Code
A - Box

For special length requirement
Please contact our sales personnel

Due to technical progress, all designs, specifications and components are subject to change without notice.